

10/07/99
jc714 U.S. PTO

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000 OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	0037.00
	First Inventor or Application Identifier	ANDREW CLARK
	Title	FLOW RESISTANCE MODULATED AEROSOLIZED ACTIVE AGENT DELIVERY
	Express Mail Label No.	EE683589195US

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	
2. <input checked="" type="checkbox"/> Specification [Total Pages <u>22</u>] - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies	
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets <u>7</u>]	ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) * Small Entity <input type="checkbox"/> Statement filed in prior application 13. <input type="checkbox"/> Statement(s) <input type="checkbox"/> Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other.	
4. Oath or Declaration [Total Pages <u>2</u>] a. <input checked="" type="checkbox"/> Newly executed original or copy b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).		
* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).		

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No 60/103,702

Prior application information: Examiner _____ Group / Art Unit _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 21968 or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name					
Address					
City	State	Zip Code			
Country	Telephone	Fax			

Name (Print/Type)	Felissa H. Cagan	Registration No. (Attorney/Agent)	35089
Signature	<i>Felissa H. Cagan</i>	Date	10/7/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

A

Practitioner's Docket No. 0037.00

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: CLARK, ANDREW ; SCHULER, CARLOS; and PABOOJIAN, STEVE
Application No.: Unassigned Group No.: Unknown
Filed: Herewith Examiner: Unassigned
For: FLOW RESISTANCE MODULATED AEROSOLIZED ACTIVE AGENT DELIVERY

Assistant Commissioner for Patents
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE


"Express Mail" label number EE683589195US
Date of Deposit 10/07/1999

I hereby state that the following *attached* paper or fee

New Patent Application

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10, on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Kathy Honnert


Signature of person mailing paper or fee

Flow Resistance Modulated Aerosolized Active Agent Delivery

Field of the Invention

5 The present invention is related to the pulmonary delivery of an active agent formulation. More particularly, it is a method and device for pulmonary delivery of an active agent formulation for increased systemic bioavailability of the active agent via absorption in the deep lung. The bioavailability is increased by modulating the flow rate of the aerosolized active agent in a manner that is independent of patient instruction and
10 flow rate monitoring.

Background of the Invention

Effective delivery to a patient is a critical aspect of any successful drug therapy.
15 Various routes of delivery exist, and each has its own advantages and disadvantages. Oral drug delivery of pills, capsules, elixirs, and the like is perhaps the most convenient method, but many drugs are degraded in the digestive tract before they can be absorbed. Subcutaneous injection is frequently an effective route for systemic drug delivery, including the delivery of proteins, but enjoys a low patient acceptance. Since injection of
20 drugs, such as insulin, one or more times a day can frequently be a source of poor patient compliance, a variety of alternative routes of administration have also been developed, including transdermal, intranasal, intrarectal, intravaginal, and pulmonary delivery.

Of particular interest, pulmonary drug delivery relies on inhalation of an active
25 agent formulation by the patient so that active drug within the dispersion can reach the distal (alveolar) regions of the lung. This may be accomplished using a patient driven device where it is the inspiratory flow that aerosolizes the active agent formulation or using a drug dispersion or aerosol device that uses a compressed gas or propellant to aerosolize and deliver the active agent formulation.

30

It has been found that certain drugs are readily absorbed through the alveolar region directly into blood circulation. Pulmonary delivery is particularly promising for the delivery of proteins and polypeptides which are difficult to deliver by other routes of administration. Such pulmonary delivery is effective both for systemic delivery and for localized delivery to treat diseases of the lungs.

Elliot et al, Aust. Paediatr. J.(1987)23:293-297 described the nebulized delivery of semi-synthetic human insulin to the respiratory tracts of six diabetic children and determined that it was possible to control diabetes in these children, although the efficiency of absorption was low (20-25%) as compared to subcutaneous delivery. Laube et al., US Patent No. 5,320,094, noting Elliot and a number of other studies, stressed that although insulin had been delivered to the lung, none of the patients had responded to the pulmonary insulin therapy sufficient for lowering of blood glucose levels to within a normal range. Laube et al. hypothesized that this problem resulted from the loss of drug in the delivery system and/or in the oropharynx as a result of the method of delivery and that the maximization of deposition within the lungs should improve glucose control in the blood. In order to achieve maximum delivery, Laube et al controlled the inspiratory flow rate at the time of aerosol inhalation at flow rates of less than 30 liters/minute and, preferably about 17 liters/minute. The delivery system included a medication chamber for receiving the insulin, an outlet aperture through which the insulin was withdrawn, and a flow rate limiting aperture to control the inspiratory flow rate.

Commonly assigned US Patent Application 60/078,212 tested the above hypothesis and noted that pulmonary delivery of insulin at less than 17 liters per minute provided for increased blood levels of insulin in a shorter time period than higher inspiratory flow rates.

Rubsamen et al, US Patent Nos. 5,364,838 and 5,672,581 describe the delivery of a measured amount of aerosolized insulin. The insulin is automatically released into the inspiratory flow path in response to information obtained from determining the

inspiratory flow rate and inspiratory volume of a patient. A monitoring device continually sends information to a microprocessor, and when the microprocessor determines that an optimal point in the respiratory cycle is reached, the microprocessor actuates the opening of a valve allowing release of insulin. The inspiratory flow rate is in the range of from about 0.1 to 2.0 liters/second and the volume is in the range of from about 0.1 to 0.8 liters.

WO 97/40819 describes slow inspiratory flow rates as being key to increased drug delivery and deposition of drugs delivered via the pulmonary route. In order to obtain the target flow rates (15-60 liters per minute), the device resistance was designed to be within the 0.12 to 0.21 (cm H₂O). EPO 692990 B1 describes deagglomerators for dry powder inhalers and notes that it is desirable to reduce the airflow rate dependence of the delivered dose and/or respirable fraction of an inhaled powder aerosol. The deagglomerators respond to increasing flow rates to vary the geometry of a channel through which powder laden air passes resulting in a lesser pressure drop increase than would be seen in the absence of the variable geometry and that provide for more effective deagglomeration over a range of flow rates.

We have now determined that, in order to effectively deliver an active agent via the pulmonary route in a comfortable and reproducible manner, it is desirable to maintain a low initial flow rate followed by a period of higher flow.

Summary of the Invention

Accordingly, in one aspect, the present invention is directed to a device for delivering an aerosolized active agent formulation to the lungs of a human patient. The device comprises a flow resistance modulator that modulates resistance to the flow of the aerosolized active agent formulation to produce an initial target flow rate of the aerosolized active agent formulation. The flow resistance modulator modulates the resistance in a manner that is independent of flow rate monitoring and patient instruction.

In another aspect, the present invention is directed to a method for delivering an active agent formulation to the lungs of a human patient. The method comprises providing the aerosolized active agent formulation with high flow resistance for an initial period followed by a period of lower flow resistance.

Description of the Figures

Figure 1 is a schematic of an embodiment of a dry powder active agent formulation delivery device of the invention.

Figure 2 is a graph of the concentration of the aerosol delivered from the device of Figure 1.

Figure 3 is a graph of the resistance of the flow resistance modulator of the device of Figure 1 as function of time.

Figure 4 is a graph of the resistance of the flow rate corresponding to the resistance shown in Figure 3.

Figure 5 are superimposed graphs a flow modulator of the invention and the corresponding flow rate of the associated device.

Figure 6 is a graph of the inhalation rates of patients using the device of Figure 1 at varying flow resistances using maximum inhalation effort.

Figure 7 is a graph of the inhalation volumes of patients using the device of Figure 1 at varying flow resistances using maximum inhalation effort.

Figure 8 is a graph of the comfortable inhalation rates of patients using the device of Figure 1 at varying flow resistances.

Figure 9 is a graph of the inhalation volumes of patient using the device of Figure 1 at varying flow resistances at a comfortable inhalation rate.

5

Detailed Description of the Invention

The present invention provides a method and device for the pulmonary delivery of an active agent formulation where flow resistance of the active agent formulation is varied with time. The invention is surprising in that it provides for increased blood levels of active agent in a comfortable and reproducible manner.

Definitions

15 “Active agent” as described herein includes an agent, drug, compound, composition of matter or mixture thereof which provides some pharmacologic, often beneficial, effect. This includes foods, food supplements, nutrients, drugs, vaccines, vitamins, and other beneficial agents. As used herein, the terms further include any physiologically or pharmacologically active substance that produces a localized or
20 systemic effect in a patient. The active agent that can be delivered includes antibiotics, antiviral agents, antiepileptics, analgesics, anti-inflammatory agents and bronchodilators, and may be inorganic and organic compounds, including, without limitation, drugs which act on the peripheral nerves, adrenergic receptors, cholinergic receptors, the skeletal muscles, the cardiovascular system, smooth muscles, the blood circulatory system,
25 synaptic sites, neuroeffector junctional sites, endocrine and hormone systems, the immunological system, the reproductive system, the skeletal system, autonomic systems, the alimentary and excretory systems, the histamine system, the central nervous system. Suitable agents may be selected from, for example, polysaccharides, steroid, hypnotics and sedatives, psychic energizers, tranquilizers, anticonvulsants, muscle relaxants,
30 antiparkinson agents, analgesics, anti-inflammatories, muscle contractants,

antimicrobials, antimalarials, hormonal agents including contraceptives, sympathomimetics, polypeptides, and proteins capable of eliciting physiological effects, diuretics, lipid regulating agents, antiandrogenic agents, antiparasitics, neoplastics, antineoplastics, hypoglycemics, nutritional agents and supplements, growth supplements, fats, antienteritis agents, electrolytes, vaccines and diagnostic agents.

Examples of active agents useful in this invention include but are not limited to insulin, calcitonin, erythropoietin (EPO), Factor VIII, Factor IX, ceredase, cerezyme, cyclosporin, granulocyte colony stimulating factor (GCSF), alpha-1 proteinase inhibitor, calcitonin, granulocyte macrophage colony stimulating factor (GMCSF), growth hormone, human growth hormone (HGH), growth hormone releasing hormone (GHRH), heparin, low molecular weight heparin (LMWH), interferon alpha, interferon beta, interferon gamma, interleukin-2, luteinizing hormone releasing hormone (LHRH), somatostatin, somatostatin analogs including octreotide, vasopressin analog, follicle stimulating hormone (FSH), insulin-like growth factor, insulintropin, interleukin-1 receptor antagonist, interleukin-3, interleukin-4, interleukin-6, interleukin-10, macrophage colony stimulating factor (M-CSF), nerve growth factor, parathyroid hormone (PTH), thymosin alpha 1, IIb/IIIa inhibitor, alpha-1 antitrypsin, respiratory syncytial virus antibody, cystic fibrosis transmembrane regulator (CFTR) gene, deoxyribonuclease (Dnase), bactericidal permeability increasing protein (BPI), anti-CMV antibody, interleukin-1 receptor, 13-cis retinoic acid, pentamidine isethionate, albuterol sulfate, metaproterenol sulfate, beclomethasone dipropionate, triamcinolone acetamide, budesonide acetate, ipratropium bromide, flunisolide, cromolyn sodium, ergotamine tartrate and the analogues, agonists and antagonists of the above. Active agents may further comprise nucleic acids, present as bare nucleic acid molecules, viral vectors, associated viral particles, nucleic acids associated or incorporated within lipids or a lipid-containing material, plasmid DNA or RNA or other nucleic acid construction of a type suitable for transfection or transformation of cells, particularly cells of the alveolar regions of the lungs. The active agents may be in various forms, such as soluble and insoluble charged or uncharged molecules, components of molecular complexes or pharmacologically

acceptable salts. The active agents may be naturally occurring molecules or they may be recombinantly produced, or they may be analogs of the naturally occurring or recombinantly produced active agents with one or more amino acids added or deleted. Further, the active agent may comprise live attenuated or killed viruses suitable for use as vaccines.

“Aerosolized active agent formulation” means the active agent as defined above in a formulation that is suitable for pulmonary delivery. The aerosolized active agent formulation may be in the dry powder form, it may be a solution, suspension or slurry to be nebulized, or it may be in admixture with a suitable low boiling point, highly volatile propellant. It is to be understood that more than one active agent may be incorporated into the aerosolized active agent formulation and that the use of the term “agent” in no way excludes the use of two or more such agents.

The “inspiratory flow rate” is the flow rate at which the aerosolized active agent formulation is delivered.

The amount of active agent in the aerosolized active agent formulation will be that amount necessary to deliver a therapeutically effective amount of the active agent to achieve the desired result. In practice, this will vary widely depending upon the particular agent, the severity of the condition, and the desired therapeutic effect. However, the device is generally useful for active agents that must be delivered in doses of from 0.001 mg/day to 100 mg/day, preferably 0.01 mg/day to 50 mg/day.

The present invention is based at least in part on the unexpected observation that when an active agent is delivered to a patient at an initially low inspiratory flow rate, the bioavailability of the active agent increases as opposed to when the active agent is delivered at a constant but higher inspiratory flow rate.

Active agent formulations suitable for use in the present invention include dry powders, solutions, suspensions or slurries for nebulization and particles suspended or dissolved within a propellant. Dry powders suitable for use in the present invention include amorphous active agents, crystalline active agents and mixtures of both amorphous and crystalline active agents. The dry powder active agents have a particle size selected to permit penetration into the alveoli of the lungs, that is, preferably 10 μm mass median diameter (MMD) or less, preferably less than 7.5 μm , and most preferably less than 5 μm , and usually being in the range of 0.1 μm to 5 μm in diameter. The delivered dose efficiency (DDE) of these powders is >30%, usually >40%, preferably >50 and often >60% and the aerosol particle size distribution is about 1.0 - 5.0 μm mass median aerodynamic diameter (MMAD), usually 1.5 - 4.5 μm MMAD and preferably 1.5 - 4.0 μm MMAD. These dry powder active agents have a moisture content below about 10% by weight, usually below about 5% by weight, and preferably below about 3% by weight. Such active agent powders are described in WO 95/24183 and WO 96/32149, which are incorporated by reference herein. However, it may be possible to deliver larger sized particles, such as those with MMD's between 10 and 30 μm so long as the MMAD's of the particles are below 5.0 μm . Such particles are described, for example, in PCT publications WO 97/44013 and WO 98/31346 the disclosures of which are incorporated herein by reference.

Dry powder active agent formulations are preferably prepared by spray drying under conditions which result in a substantially amorphous powder. Bulk active agent, usually in crystalline form, is dissolved in a physiologically acceptable aqueous buffer, typically a citrate buffer having a pH range from about 2 to 9. The active agent is dissolved at a concentration from 0.01% by weight to 1% by weight, usually from 0.1% to 0.2%. The solutions may then be spray dried in a conventional spray drier available from commercial suppliers such as Niro A/S (Denmark), Buchi (Switzerland) and the like, resulting in a substantially amorphous powder. These amorphous powders may also be prepared by lyophilization, vacuum drying, or evaporative drying of a suitable active agent solution under conditions to produce the amorphous structure. The amorphous

active agent formulation so produced can be ground or milled to produce particles within the desired size range. Dry powder active agents may also be in a crystalline form. The crystalline dry powders may be prepared by grinding or jet milling the bulk crystalline active agent.

5

The active agent powders of the present invention may optionally be combined with pharmaceutical carriers or excipients which are suitable for respiratory and pulmonary administration. Such carriers may serve simply as bulking agents when it is desired to reduce the active agent concentration in the powder which is being delivered to a patient, but may also serve to improve the dispersability of the powder within a powder dispersion device in order to provide more efficient and reproducible delivery of the active agent and to improve handling characteristic of the active agent such as flowability and consistency to facilitate manufacturing and powder filling. Such excipients include but are not limited to (a) carbohydrates, e.g., monosaccharides such as fructose, galactose, glucose, D-mannose, sorbose, and the like; disaccharides, such as lactose, trehalose, cellobiose, and the like; cyclodextrins, such as 2-hydroxypropyl- β -cyclodextrin; and polysaccharides, such as raffinose, maltodextrins, dextrans, and the like; (b) amino acids, such as glycine, arginine, aspartic acid, glutamic acid, cysteine, lysine, and the like; (c) organic salts prepared from organic acids and bases, such as sodium citrate, sodium ascorbate, magnesium gluconate, sodium gluconate, tromethamine hydrochloride, and the like; (d) peptides and proteins such as aspartame, human serum albumin, gelatin, and the like; and (e) alditols, such as mannitol, xylitol, and the like. A preferred group of carriers includes lactose, trehalose, raffinose, maltodextrins, glycine, sodium citrate, human serum albumin and mannitol.

25

The dry powder active agent formulations may be delivered using Inhale Therapeutic Systems' dry powder inhaler as described in WO 96/09085 which is incorporated herein by reference, but adapted to control the flow resistance as described below. The dry powders may also be delivered using a metered dose inhaler as described by Laube et al in US Patent No. 5,320,094, which is incorporated by reference herein or

30

by a patient driven device such as that described in US Patent No. 4,338,931 which is incorporated by reference herein.

662007-18E4F460

Nebulized solutions may be prepared by aerosolizing commercially available
5 active agent formulation solutions. These solutions may be delivered by a dosimeter, that
is a nebulizer that delivers an aerosol in a controlled, bolus dose, such as the Raindrop,
produced by Puritan Bennett, the use of which is described by Laube et al. Other
methods for delivery of solutions, suspensions or slurries are described by Rubsamen et
al. US Patent No. 5,672,581. A device that uses a vibrating, piezoelectric member is
10 described in Ivri et al. US Patent No. 5,586,550, which is incorporated by reference
herein.

Propellant systems may include an active agent dissolved in a propellant or
particles suspended in a propellant. Both of these types of formulations are described in
15 Rubsamen et al. US Patent No. 5,672,581, which is incorporated herein by reference.

In order to obtain the increased bioavailabilities of active agent, the devices
described above must be modified in order to restrict the initial inspiratory flow rate of
the active agent formulation. We have found that once an initial period of low inspiratory
20 flow rate has been established, the restriction can be relieved and a higher flow rate is
permissible. If the higher flow rate is not established, the patient will become frustrated
and will cease to inhale.

According to the invention, a flow rate of less than about 15 liters per minute,
25 preferably less than 10 liters per minute and often between about 5 and 10 liters per
minute will be established for a period of less than about 10 seconds, preferably less than
5 seconds and often between about 3 and 5 seconds. Following this initial period of
limited flow rate, the flow rate restriction will be released and the flow rate will be the
normal inspiratory flow rate of the patient. This flow rate is between about 15 and 80
30 liters per minute, usually between about 15 and 60 liters per minute and often between

about 15 and 30 liters per minute. In order to accomplish this, a flow resistance modulator will be incorporated into the device. A pressure sensor in the device will determine the onset of inhalation. The flow resistance modulator will be set to a high resistance, between about 0.4 and 2 (cm H₂O) / SLM (where SLM is liters per minute at standard temperature and pressure), usually between about 0.4 and 1.5 (cm H₂O) / SLM and often between about 0.5 and 1.0 (cm H₂O) / SLM to obtain the flow rate described above. Once the initial period of limited flow has passed, as determined by the pressure sensor and the pre-established time period, the flow resistance modulator will be reset such that it will provide little if any resistance to the flow. This resistance will be between about 0 and 0.3 (cm H₂O) / SLM usually between 0 and 0.25 (cm H₂O) / SLM and often between 0 and 0.2 (cm H₂O) / SLM. Accordingly, the normal, comfortable inspiratory flow rate of the patient will be established. An exemplary system for flow rate modulation is shown in Figure 1. In this system, the flow rate modulator is a valve (100) placed on the intake air manifold (102) to the device (104) to control the flow rate of the intake air. Flow meter (106) and computer (108) are only used to assess patient behavior in response to flow restriction for investigational purposes. Pressure sensor (110) measures the onset of inhalation and triggers the opening of valve (100). Although the flow rate modulator in this case is shown to be a valve driven by a microprocessor, simple mechanical valving systems may be used as well. Further, in order to detect onset of inhalation, either a flow sensor or a pressure sensor could be used.

According to a further feature of this invention, it has been found that impaction in the throat by particles is proportional to the flow rate and the square of the aerodynamic diameter according to the following equation:

$$I = kd^2Q$$

I = number of particles impacting in the throat

k = proportionality constant

d = MMAD of the particles

Q = flow rate

According to the above equation, it is possible to deliver larger particles using the low initial flow rates of the current invention without raising the number of particles that impact in the throat provided the majority of the active agent is delivered during the low flow rate period. Initially, then, when the flow rate is low and the concentration of the aerosol is high, that is, the number of particles in the aerosol is at its peak, the particles will be preferentially delivered to the deep lung rather than being impacted in the throat and the bioavailability of the active agent will be increased.

The aerosol concentration exiting the device of Figure 1 is shown in Figure 2. For a 0.5 liter aerosol, the graph shows that the concentration of the first 0.1 to 0.2 liters is the highest and that after that the concentration tapers off. It is therefore important to deliver the initial portion of the aerosol at a low flow to avoid throat impaction and increase bioavailability. The resistance profile of a flow rate modulator to accomplish this is shown in Figure 3. The resistance is high (0.65 (cm H₂O) / SLM) for an initial 3 second time period, the valve is then opened and the resistance transitions to the normal resistance of the device (in this case 0.15 (cm H₂O) / SLM). As can be seen from the flow rates of Figure 4, the inspiratory flow rate in the initial period is about 10 SLM and then transitions up to about 25-30 SLM. The resistance profile of a further flow rate modulator of the invention and its associated flow rate profile is shown in Figure 5. The resistance transitions from high to low (0.9 to 0.20 (cm H₂O) / SLM) for an initial 5 second time period. As can be seen from the flow rates of Figure 5, the inspiratory flow rate in the initial 3 second period is less than 20 SLM and then transitions up to about 30 SLM. In both of these cases, since the concentration of the aerosol in the first 0.1 to 0.2

liters is the greatest, the majority of the active agent is delivered in the initial 3 second time period. This increases the deep lung delivery and thus the bioavailability of the active agent.

The following examples are illustrative of the present invention. They are not to be construed as limiting the scope of the invention. Variations and equivalents of the examples will be apparent to those of skill in the art in light of the present disclosure, the drawings and the claims herein.

Examples

Example 1

In order to determine the relationship of flow resistance to flow rate, 10 volunteers, 5 males (M) and 5 females (F) were asked to breathe against 3 different resistances and instructed to inhale both maximally and at a comfortable rate. The results are shown in Figures 6-9. Figures 6 and 7 are the flow rates for maximal and comfortable inhalation rates for males and females. Figures 8 and 9 show the volumes of aerosol inhaled at the maximum and comfortable inhalation rates and resistances described above.

The resistance to comfortably maintain a 10 liter per minute flow rate is about 0.3 (cm H₂O) + SLM. Further, the inspiratory volume of aerosol delivered at higher flow resistances drops because inspiration becomes more and more difficult and less comfortable as resistance increases. In fact, if resistance is decreased after the initial aerosol delivery period of high resistance, the inspiratory volume will not decrease significantly over the volume delivered at a constant low flow resistance delivery rate.

Example 2

Materials and Methods

Materials

Crystalline human zinc insulin, 26.3 U/mg is obtained from Eli Lilly and Company, Indianapolis, IN and found to be >99% pure as measured by reverse phase HPLC. USP mannitol is obtained from Roquette Corporation (Gurnee, IL). Glycine was purchased from Sigma Chemical Company (St. Louis, Missouri). Sodium citrate dihydrate, USP is obtained from J.T. Baker (Phillipsburg, NJ).

Powder Production

Insulin powders are made by dissolving bulk crystalline insulin in sodium citrate buffer containing mannitol and glycine to give final solids concentration of 7.5 mg/ml and pH of 6.7 ± 0.3 . The spray dryer is operated with an inlet temperature between 110°C and 120°C and a liquid feed rate of 5 ml/min, resulting in an outlet temperature between 70°C and 80°C. The solutions are then filtered through a 0.22 μm filter and spray dried in a Buchi Spray Dryer to form a fine white amorphous powder. The resulting powders are stored in tightly capped containers in a dry environment (<10% RH).

Powder Analysis

The particle size distribution of the powders is measured by liquid centrifugal sedimentation in a Horiba CAPA-700 Particle Size Analyzer following dispersion of the powders in Sedisperse A-11 (Micrometrics, Norcross, GA). The moisture content of the powders is measured by the Karl Fischer technique using a Mitsubishi CA-06 Moisture Meter. The aerosol particle size distribution is measured using a cascade impactor (Graseby Andersen, Smyrna, GA). The delivered dose efficiency (DDE) is evaluated using the Inhale Therapeutic Systems' aerosol devices, similar to those described in WO96/09085. The DDE is defined as the percentage of the nominal dose contained within a blister package that exited the mouthpiece of the aerosol device and was captured on a glass fiber filter (Gelman, 47 mm diameter) through which a vacuum was

drawn (30L/min) for 2.5 seconds following device actuation. DDE is calculated by dividing the mass of the powder collected on the filter by the mass of the powder in the blister pack.

5 The integrity of insulin before and after powder processing is measured against a reference standard of human insulin by redissolving weighed portions of powder in distilled water and comparing the redissolved solution with the original solution put into the spray dryer. Retention time and peak area by rpHPLC are used to determine whether the insulin molecule had been chemically modified or degraded in the process. UV
10 absorbance was used to determine insulin concentration (at 278 nm) and presence of absence of insoluble aggregates (at 400 nm). In addition, the pHs of the starting and reconstituted solutions are measured. The amorphous nature of the insulin powder is confirmed by polarized light microscopy.

15 In Vivo Testing

 In order to examine the effect of changes in the rate of inhalation on the bioavailability of inhaled insulin, 24 individuals are dosed with 2 mg of insulin using the system shown in Figure 1. Each treatment will consist of two inhalations of 1 mg each. Inhalers are Inhale Therapeutic Systems Inhalers (San Carlos, CA) as described in US
20 Patent No. 5,740,794, which is incorporated by reference herein. The treatments are:

- A. Inhalation administration of insulin with a particle size of 3.6μ MMAD (large PSD), utilizing the standard breathing maneuver and inhaler (no ramp).
- 25 B. Inhalation administration of insulin with a particle size of 3.6μ MMAD (large PSD), with the inhalation rate limited to approximately 10 liters per minute by the system shown in Figure 1 (ramp).

C. Inhalation administration of insulin with a particle size of 2.6μ MMAD (small PSD), with the inhalation rate limited to approximately 10 liters per minute by the system shown in Figure 1 (ramp).

5 The insulin dry powder formulations have average particle diameters of less than 5 microns. The inhaler disperses the powders and produces aerosol clouds (puffs) of medication which are held in a volume of approximately 240 ml in a holding chamber. The volume of the holding chamber is a minor fraction of a deep inspiratory breath (>2 liters). The chamber is designed so that during inhalation of the puff, ambient air is
10 pulled into the chamber thereby pushing aerosol out of the chamber and deep into the lungs.

 Blood sufficient to provide a minimum of 1 ml plasma was collected from 24 subjects in heparinized tubes at 30 and 15 minutes prior to insulin dosing and 0 (just prior
15 to insulin dosing), 5, 10, 20, 30, 45, 60, 90, 120, 180, 240, 300 and 360 minutes after the start of the inhalation. The insulin bioavailabilities for samples taken at 360 minutes are shown in Table I as uU.min/mL (microunits of insulin per milliliter of blood plasma). These figures show that a low initial flow rate followed by a higher flow rate provided for higher bioavailability of insulin than the constant higher flow rate (an average of 11%
20 increase for the condition of case B as compared to case A. The combination of low initial flow rate and small particle size further increased bioavailability (an average of a 242% increase for case C as compared with case B).

Table I

Subject Number	AUC360 (uU.min/m L)			AUC360 Ratio	
	A no ramp large PSD	B ramp large PSD	C ramp small PSD	B/A Effect of Ramp	C/B Effect of PSD
50180001	728	2300	4403	3.16	1.91
50180002	1187	1394	2704	1.17	1.94
50180003	944	1191	3490	1.26	2.93
50180004	1973	737	2600	0.37	3.53
50180005	3362	4243	7294	1.26	1.72
50180006	2217	2948	5452	1.33	1.85
50180007	1507	1017	2554	0.67	2.51
50180008	795	996	1900	1.25	1.91
50180009	2447	2250	3593	0.92	1.60
50180010	5644	5613	12474	0.99	2.22
50180011	1714	441	2206	0.26	5.00
50180012	523	393	2602	0.75	6.62
50180013	1036	1129	1794	1.09	1.59
50180014	2823	2834	4468	1.00	1.58
50180015	1835	2038	2488	1.11	1.22
50180016	1623	1102	2636	0.68	2.39
50180018	2317	1965	5561	0.85	2.83
50180019	690	1175	2373	1.70	2.02
50180020	1399	1113	3045	0.80	2.74
50180021	681	834	2157	1.22	2.59
50180022	1093	2137	3564	1.96	1.67
50180023	1931	2157	5098	1.12	2.36
50180024	255	134	183	0.53	1.37
50180028	731	822	1627	1.12	1.98
AVG	1644	1707	3594	1.11	2.42
STD	1158	1263	2440	0.58	1.20
RSD	70	74	68	52	50

The disclosure of each publication, patent or patent application mentioned in this specification is incorporated by reference herein to the same extent as if each individual publication, patent or patent application were specifically and individually indicated to be incorporated by reference.

We claim:

1. A device for delivering an aerosolized active agent to the lungs of a human patient,
5 said device comprising a flow resistance modulator that modulates resistance of the flow
of the aerosolized active agent formulation to produce an initial target flow rate of the
aerosolized active agent formulation in a manner that is independent of flow rate
monitoring and patient instruction.

2. The device of claim 1 wherein the flow resistance modulator modulates the flow
10 of the aerosolized active agent formulation with time.

3. The device of claim 1 wherein the flow resistance modulator initially produces a
initial target flow rate of less than 15 liters per minute.

4. The device of claim 3 wherein initial target flow rate is less than 10 liters per
minute.

5. The device of claim 1 wherein the initial target flow rate is maintained for less
15 than 10 seconds.

6. The device of claim 1 wherein the aerosolized active agent formulation comprises
a dry powder active agent formulation

7. The device of claim 1 wherein the aerosolized active agent formulation comprises
20 an active agent delivered in a bolus in nebulized form.

8. The device of claim 1 wherein the aerosolized active agent formulation comprises
an active agent in admixture with a propellant.

9. The device of claim 1 wherein the aerosolized active agent formulation comprises
an active agent solution.

10. The device of claim 1 wherein the aerosolized active agent formulation comprises an active agent suspension.

11. The device of claim 1 wherein the aerosolized active agent formulation comprises an active agent slurry.

5 12. The device of claim 1 wherein the device is a patient driven device.

13. The device of claim 1 wherein the active agent is selected from the group consisting of insulin, cyclosporin, parathyroid hormone, follicle stimulating hormone, alpha-1-antitrypsin, budesonide, human growth hormone, growth hormone releasing hormone, interferon alpha, interferon beta, growth colony stimulating factor, leutinizing
10 hormone releasing hormone, calcitonin, low molecular weight heparin, somatostatin, respiratory syncytial virus antibody, erythropoietin, Factor VIII, Factor IX, ceredase, cerezyme and analogues, agonists and antagonists thereof.

14. A method for delivering an aerosolized active agent to the lungs of a human patient, said method comprising delivering the aerosolized active agent formulation at a
15 high flow resistance for an initial time period.

15. The method of claim 13 wherein the high flow resistance is a resistance of between 0.4 and 2 (cm H₂O) SLM.

16. The method of claim 13 wherein the low flow resistance is a resistance of between 0 and 0.3 (cm H₂O) SLM.

20 17. The method of claim 13 wherein the high flow resistance corresponds to a flow rate of 15 liters per minute or less.

18. The method of claim 13 wherein the low flow resistance corresponds to a flow rate of 15-80 liters per minute.

25 19. The method of claim 13 wherein the initial time period is a period of less than 10 seconds.

20. The method of claim 19 wherein the initial time period is a period of less than 5 seconds.

Abstract of the Disclosure

The present invention is directed to methods and devices for delivering an active
5 agent formulation to the lung of a human patient. The active agent formulation may be in
dry powder form, it may be nebulized, or it may be in admixture with a propellant. The
active agent formulation is delivered to a patient at a low inspiratory flow rate for an
initial period of time to increase bioavailability of the active agent.

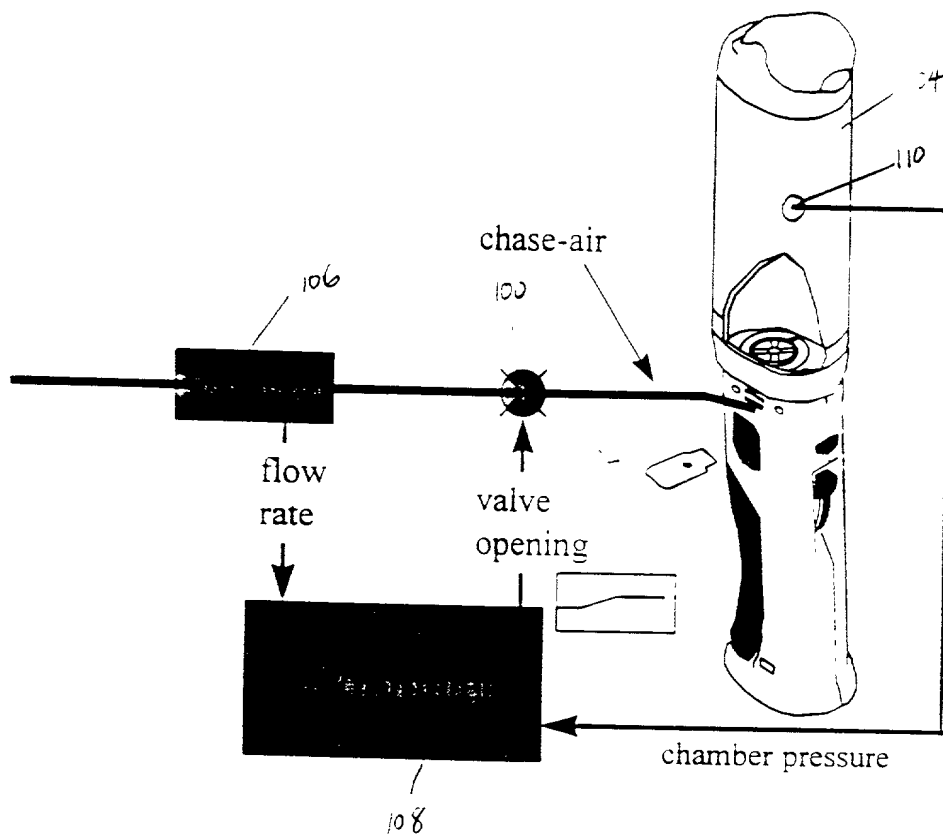


Figure 1

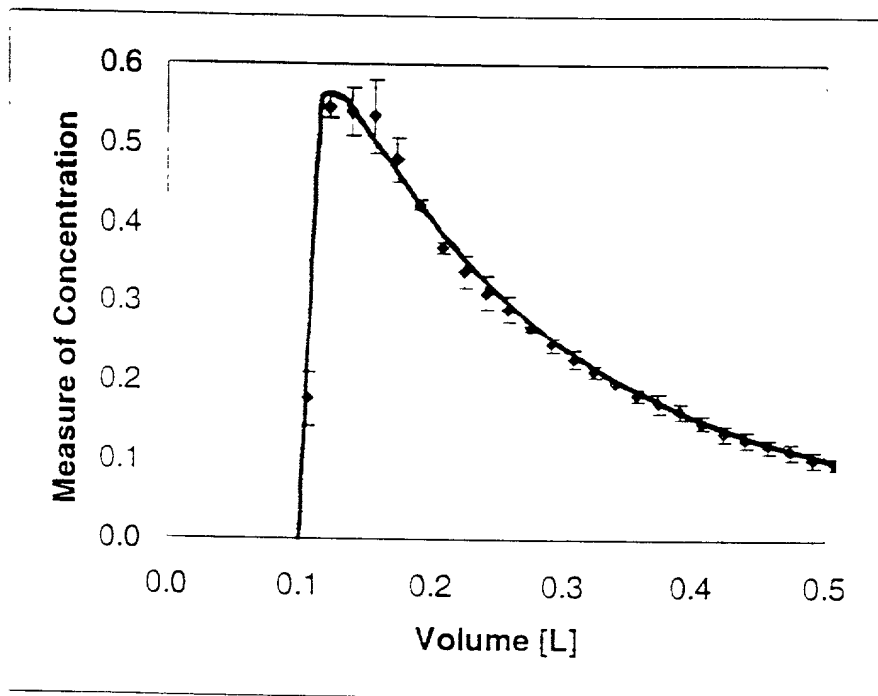


Figure 2

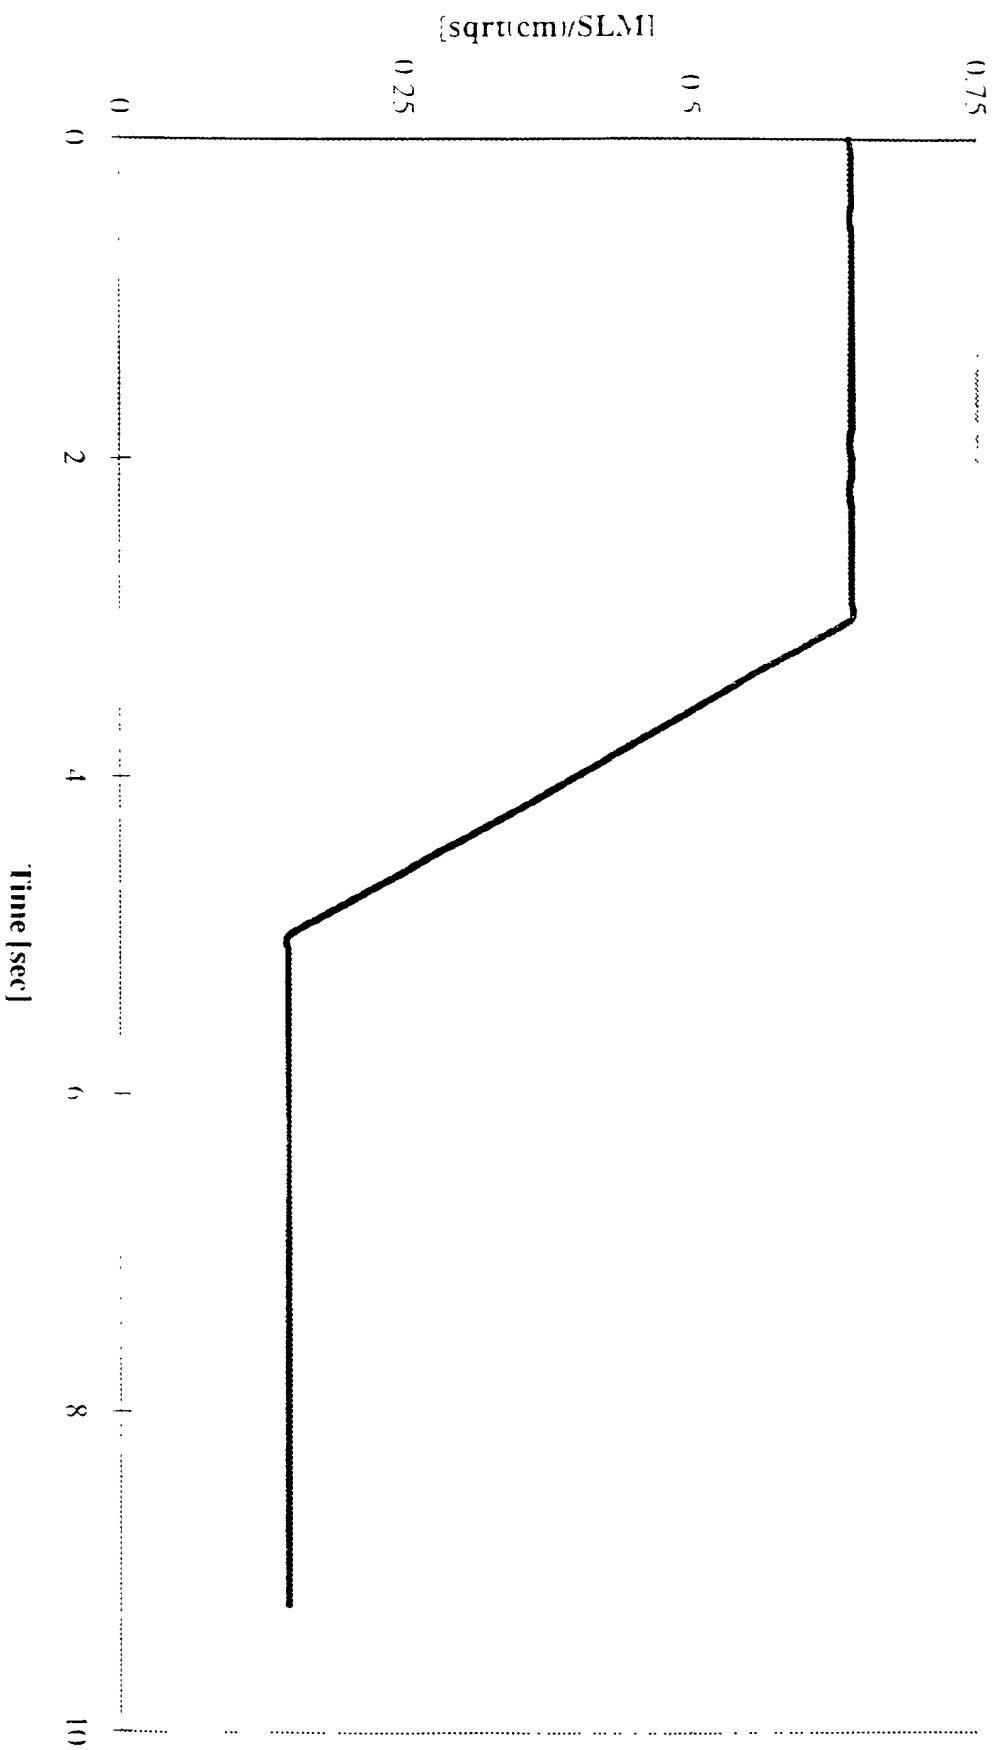


Figure 3

09444384-100799



Figure 11

09444334.0099

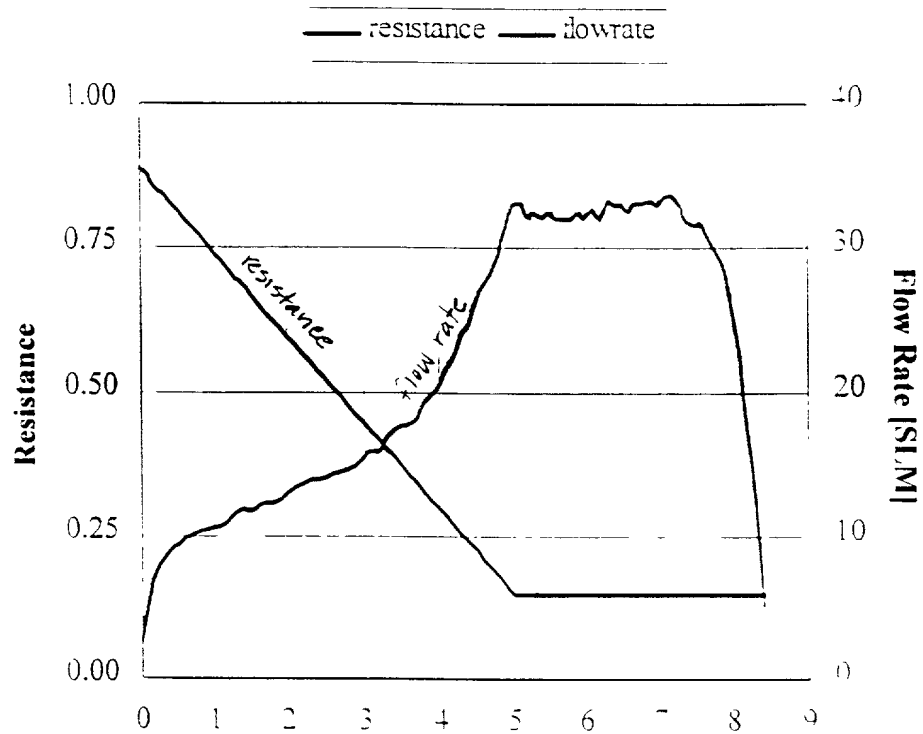


Figure 5

Maximum Inhalation

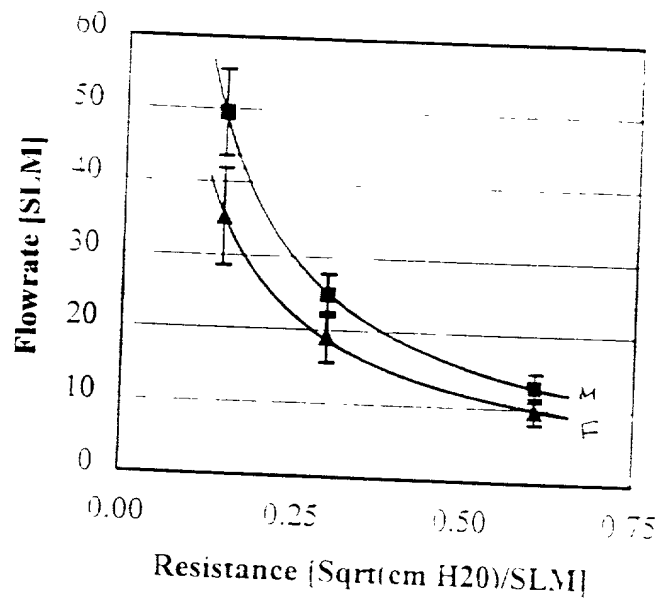


Figure 6

Comfortable Inhalation

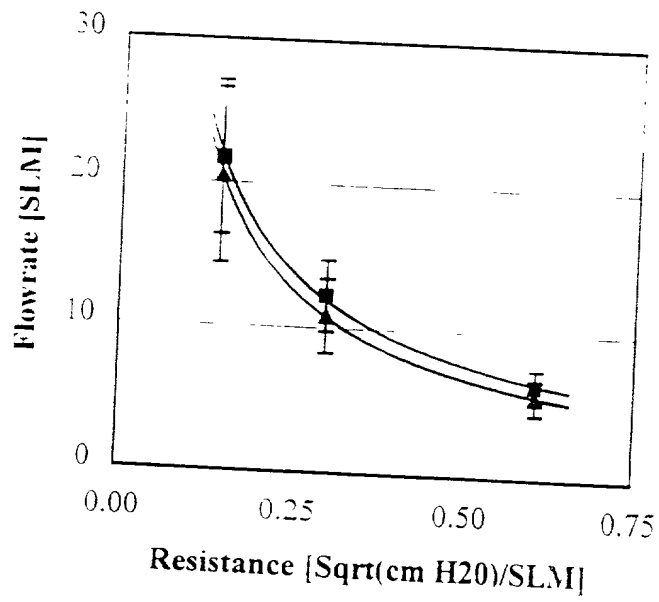


Figure 7

Maximum Inhalation

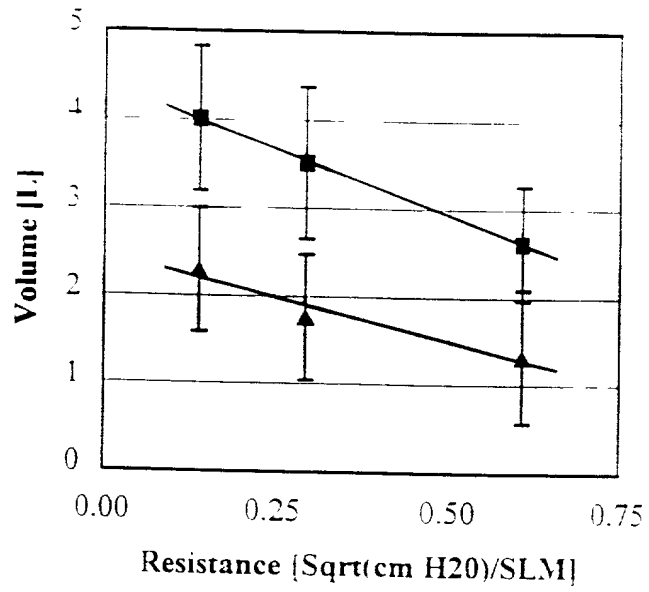


Figure 8

Comfortable Inhalation

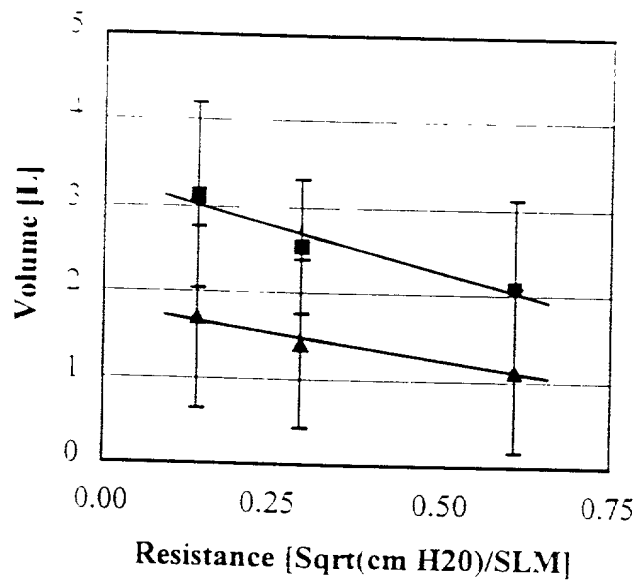


Figure 9

Please type a plus sign (+) inside this box ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	0037.00
	First Named Inventor	CLARK, ANDREW
	COMPLETE IF KNOWN	
	Application Number	
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

FLOW RESISTANCE MODULATED AEROSOLIZED ACTIVE AGENT DELIVERY

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 356(b) of any foreign application(s) for patent or inventor's certificate, or 356(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto
60/103,702	10/09/1998	

[Page 1 of 2]

Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

Please type a plus sign (+) inside this box → ☐

PTO/SB/01(12-97)
Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02C attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith

☒ Customer Number 21968

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto

Direct all correspondence to: ☒ Customer Number or Bar Code Label 21968 OR ☐ Correspondence address below

Name					
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

ANDREW

CLARK

Inventor's Signature					Date		
Residence City	Half Moon Bay	State	CA	Country		Citizenship	GB
Post Office Address	436 Valdez						
Post Office Address							
City	Half Moon Bay	State	CA	ZIP	94019	Country	

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box →

PTO/SB/02A (3-97)
Approved for use through 9/30/98 OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
CARLOS				SCHULER			
Inventor's Signature				Date			
Residence: City	Cupertino	State	CA	Country		Citizenship	VENEZUELA
Post Office Address		10344 Denison Avenue					
Post Office Address							
City	Cupertino	State	CA	ZIP	95014	Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
STEVE				PABOOJIAN			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	UNITED STATES
Post Office Address		2133 Avy Avenue					
Post Office Address							
City	Menlo Park	State	CA	ZIP	94025	Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Washington, DC 20231.